


QUICK START

CABLE I.D. PRINTER

XCC® PROMARK T-1000


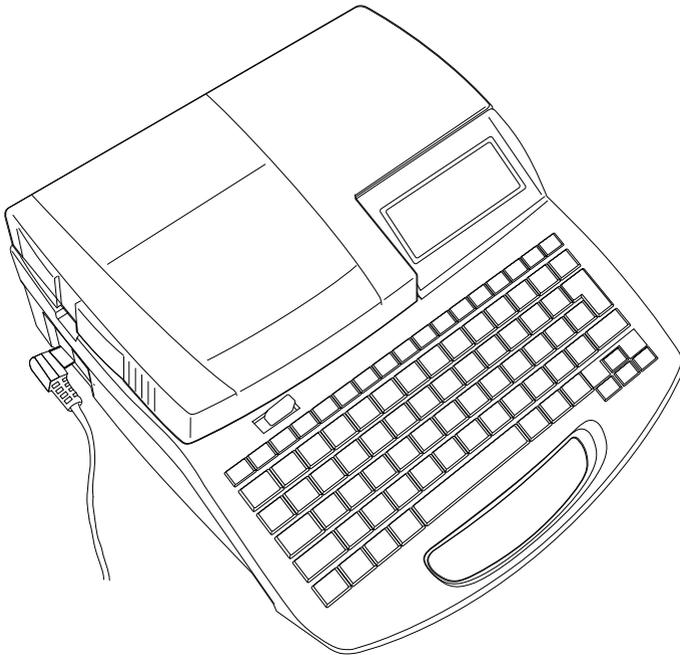


Thank you for purchasing your new PROMARK T-1000 printer. The T-1000 is a professional, portable, thermal-transfer printer for Partex profiles, with which you can easily make your own markers for wires, cables and electrical components. The printer is compatible with Partex software that enables you to import files directly from Excel. The PROMARK T-1000 is the perfect solution for contractors, electricians and manufacturers of control cabinets.

XCC® PARTEX
MARKING SYSTEMS

INSTALLING ACCESSORIES


- 1 Check that the power switch is turned off.

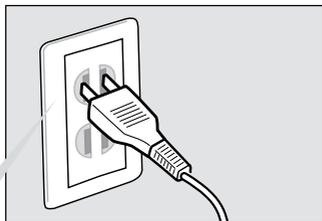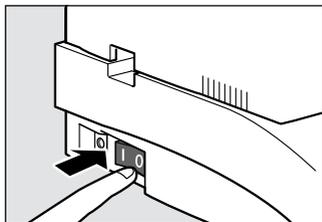

HOUSEHOLD POWER OUTLET

 The shape of the power plug varies according to country.




- 2 Attach the AC adapter (N14584).

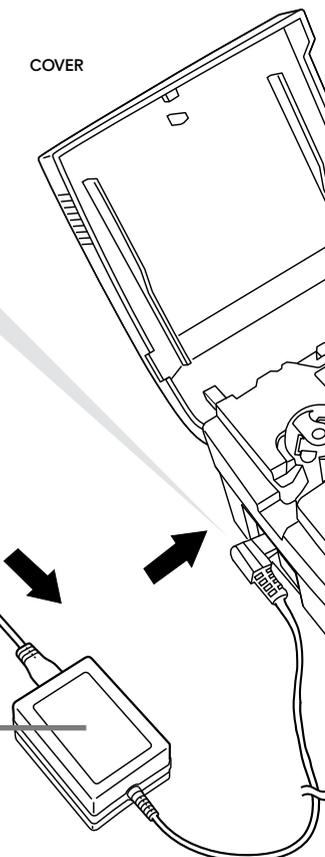

- 3 Open the cover.


- 4 Install the ribbon cassette.

Remove the stopper and take up any slack in the ribbon. Push the cassette in until it clicks into place.



CAUTION


Do not touch the connector (metal part). Do not hold the connection terminal (metal part) of the cassette. Doing so could cause an improper recognition of the cassette.

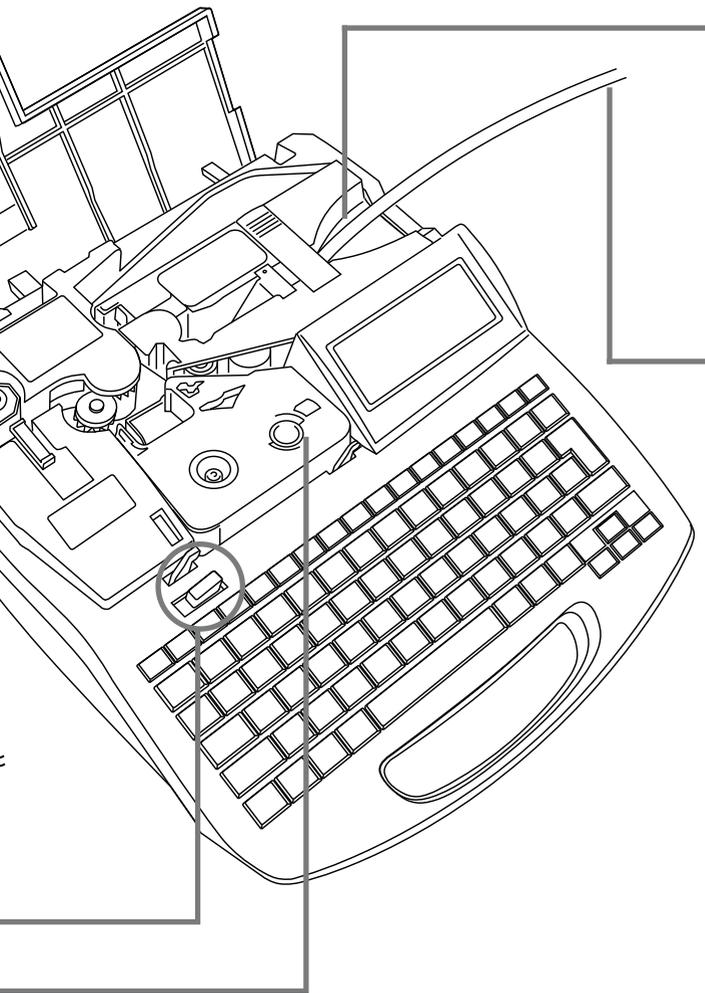

5 Install the tube attachment.


Align the hooks on the tube attachment with the holes in the printer.

Push the tube attachment in until it clicks into place.

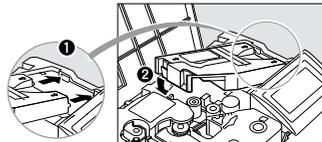


6 Insert a tube.

Push the tube in until its tip touches the transport roller 2.

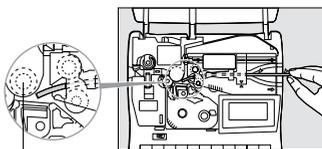


Transport roller 2

Insert the tube with the curve oriented as shown in the figure. If the tube is inserted in a wrong orientation, it can jam and cause a feed error.




POWER UP

7 Close the cover.

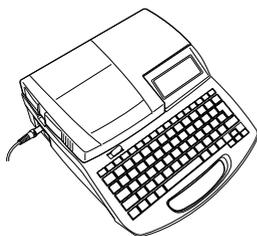


8 Turn on the power switch.




INPUTTING CHARACTERS

[Example] Printing "C-2" onto PO-05 profile.

PRINTED RESULTS 

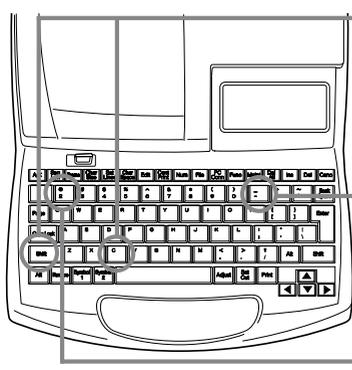

9 While holding down [Shift], press [C].



10 Press [-].



11 Press [2].



ATTENTION!

IF YOU ACCIDENTALLY INPUT AN INCORRECT CHARACTER

ex. Although you meant to enter "C-2", you entered "C=2" by mistake.

1 Press [◀] and [▶] and move the cursor box to the position of the "2".




2 Press [Back Space]. The "=" disappears.



3 Press [-].




PRINTING

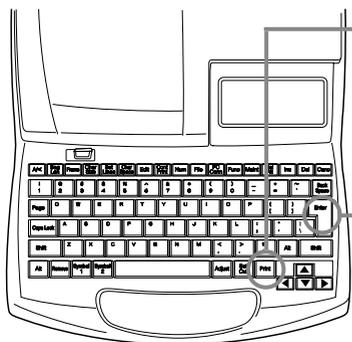

12

Press [Print].
Make sure that "PO" is selected.



"No ribbon cassette" is displayed if the ribbon cassette is not installed. Install the ribbon cassette. "No ribbon information". No ribbon amount displayed. Press enter" is displayed if the information cannot be read due to a ribbon cassette failure etc. If this message is displayed, follow the instructions on the screen.


13

Press [Enter].
Make sure that size PO-05 is selected.





14

Press [Enter].
Make sure that "Sets to print" is "1".



15

Press [Enter].
The tube is automatically fed into the printer and printing begins. Once printing is completed, the tube is cut automatically.

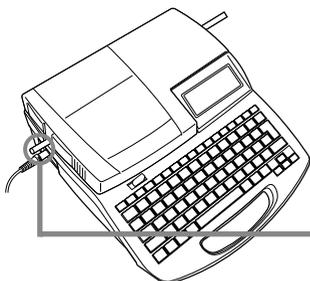

16

Take out the cut tube.